

BELLOW TYPE (INDUSTRIAL)

BT

SPECIAL FEATURES

- COMPACT & ECONOMICAL
- RELIABLE
- FIELD ADJUSTABLE
- AUTO RESET


APPLICATIONS

- BOILERS
- WATER TREATMENT
- FIRE FIGHTING SYSTEMS
- COMPRESSORS

TECHNICAL SPECIFICATIONS - STANDARD VERSION

Repeatability	:	± 2 % F. S.
Scale Accuracy	:	± 5 % F. S.
Scale	:	bar with psi
Range	:	Refer "How to order"
Differential	:	Adjustable
Mounting	:	Bottom / Panel
Mounting Accessories	:	Mounting Bracket with Screws
Process Connection	:	1/4" BSP (F)
Enclosure Protection	:	IP 32
Enclosure Material	:	Steel (Plated) with Plastic Cover
Maximum Process Temperature	:	100 °C
Ambient Temperature	:	-10 to 60 °C
Switch	:	1 SPDT
Switch Rating	:	15 A, 220 VAC & 10 A, 24 VDC
Sensing Element	:	Phosphor Bronze Bellows
Process Medium	:	Air, Oil & Water

DIMENSIONAL DETAILS

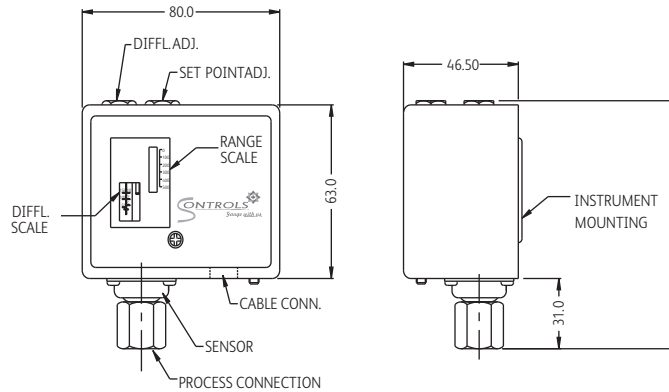

Notes : • Drawings are not to scale. • All Dimensions are in mm.

HOW TO ORDER

BASIC MODEL

2211 PS	BT
------------	----

RANGE

Ordering Code	Model No.	Range (bar)		Differential (bar)	
		Min	Max	Min	Max
3	UT3	0	3	0.25	1.5
6	UT6	0	6	0.6	3
10	UT10	0	10	1	3
16	UT16	3	16	1	4
20	UT20	5	20	2	5
30	UT30	5	30	5	12

OPTIONS (* Through adaptors)

PW CALIBRATION CERTIFICATE 2NM 1/4" NPT (M)* 2NF 1/4" NPT (F)* SX SS TAG PLATE

