




Features

- Threaded horizontal port inlet on the front side and Flange outlet on the back side, test connection on the body.
- The isolating bonnet are positioned on the left and right hand side and the Equalizing Bonnet is positioned on the top.

Standard Connection

Product	Process side	Instrument side	Vent/Test
2VQ	1/2" NPT Female	Flange	1/4" NPT Female

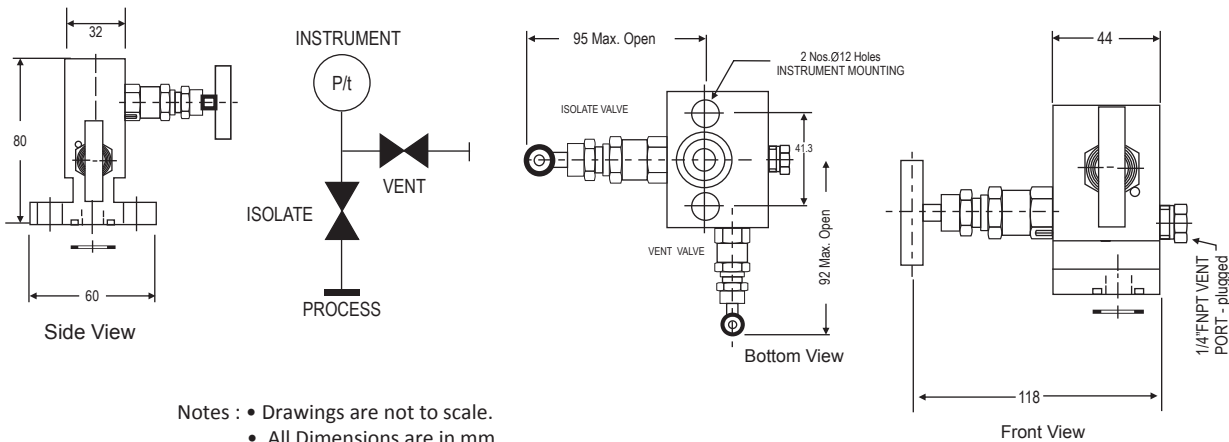

Specification - Standard Version

Body	: ASTM A182F 316 / 316L
Stem	: ASTM A276 GR 316
Valve assembly	: ASTM A182F 316 / 316L
'T' bar handle	: ASTM A276 GR 316
Maximum working pressure	: 6000 PSI
Maximum working temperature	: 240°C
Packing	: PTFE
Type of stem	: Type CT; Stem with conical metal tip
Drain port	: 1/4" NPT [F]; provided with SS 316 plug

How To Order - Ordering Example: 6211MF: 2VQ.SS.CT.P.2F.FD.N

Basic Model		6211MF : 2VQ					
Code	Body Material	Code	Body Material	Code	Body Material	Code	Body Material
CS	Carbon Steel	SS	ASTM A182F 316	SS3	SS 304	SSL	ASTM A182F 316L
MON4	Monel 400	MON5	Monel 500	HTLC	Hastelloy C		
Code	Stem Type	Code	Stem Type				
CT	CT	DS	DS				
Code	Stem Packing	Code	Stem Packing				
P	PTFE	G	Grafoil				
Code	Size (Inlet x Outlet)	Code	Size (Inlet x Outlet)	Code	Size (Inlet x Outlet)		
4F	1/4" x Flange	38F	3/8" x Flange	2F	1/2" x Flange		
Code	Connections						
FD	Female x Flange						
Code	Threads	Code	Threads	Code	Threads		
N	NPT (ANSI B 1.20.1)	B	BSPP (BS 2779, ISO 228/1)	BT	BSPT (BS 21, ISO 7/1)		
Code	Options						
CN	Compliance to NACE standard						
OS	For Oxygen service, valves are supplied cleaned, degreased and suitably packed.						
MTC	Material test certificate *						
GO	Hydro test certificate						

*Material test certificates will be provided for wetted parts only with chemical composition testing. For others, please consult factory.

NOTE:

- The weld prepared types are available with female plain end - suitable for socket weld.
- Anti-tamper bonnet - special design on request with locking arrangement if desired.